


UPVC BALL VALVE DATA SHEET

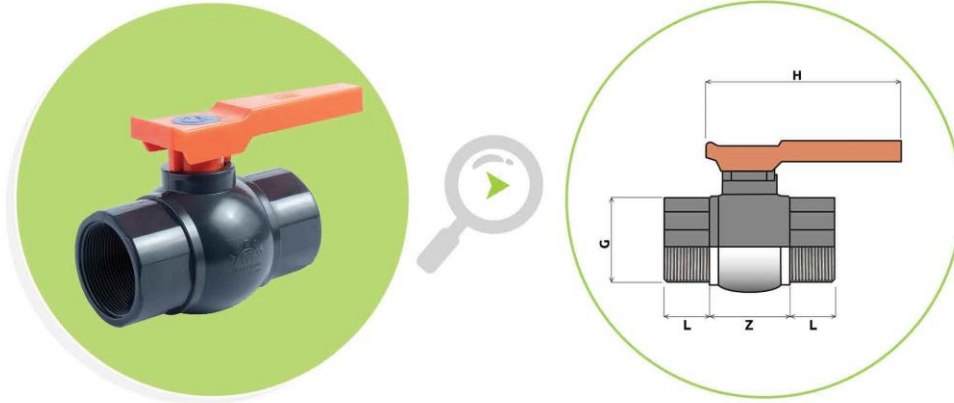

GENERAL SPECIFICATION :

- Operation pressure 10bar.
- Recommended Temperature 20C°.
- Available sizes are threaded 2" / glue 60mm.
- Types (threaded – glue) (inch/mm).

CODE	D	L	G	Z	H	PN
BV063T6	60	35	70	70	165	10

PARTS:

PART	MATERIAL
HAND	PP
BALL	PP
UNION END	PVC
UNION NUT	PVC
O-RING	TPE

- The above product meets the requirements of the European & Egyptian specifications (DIN 8063 - ISO 1452-3 – ES 848-2001).

Head Office.

15 Nablus St, from Shehab St,
Floor 4, App 10, Mohandessin, A.R.E
T. +202 33024067 F. +202 33423085

Factory.

2nd Industrial Zone Plot BG/9,
Sadat City, Al Monofia Governorate A.R.E
T. +2048 2656307 M. +201000443663

info@migagreen.com
migagreenplast

