


UPVC DOUBLE UNION BALL VALVE DATA SHEET

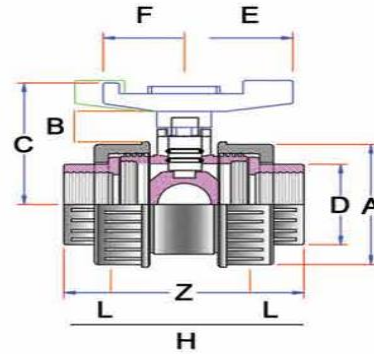

GENERAL SPECIFICATION :

- Operation pressure 16bar.
- Recommended Temperature 20C°.
- Available sizes from 1" up to 2".
- Types (threaded – glue) (inch/mm).

CODE	D	DN	L	Z	H	A	B	C	E	F	PN
DBV61001	1"	25	22	56	105	68	20	68	49	37	16
DBV61002	1 ½"	40	25	74	129	94	24	90	70	49	16
DBV61003	2"	50	45	109	210	124	23	105	77	40	16
DBV61004	2 ½"	65	44	130	218	145	25	123	90	45	16
DBV61005	3"	80	51	148	250	166	28	138	100	50	10
DBV61006	4"	100	61	168	290	210	28	160	120	60	10

PARTS:

PART	MATERIAL
HAND	ABS
BALL	PVC
UNION END	PVC
UNION NUT	PVC
O-RING	EPDB

- The above product meets the requirements of the European & Egyptian specifications (DIN 8063 - ISO 1452-3 – ES 848-2001).

Head Office.

15 Nablus St, from Shehab St,
Floor 4, App 10, Mohandessin, A.R.E
T. +202 33024067 F. +202 33423085

Factory.

2nd Industrial Zone Plot BG/9,
Sadat City, Al Monofia Governorate A.R.E
T. +2048 2656307 M. +201000443663

info@migagreen.com
migagreenplast

