


UPVC FLANGE DATA SHEET

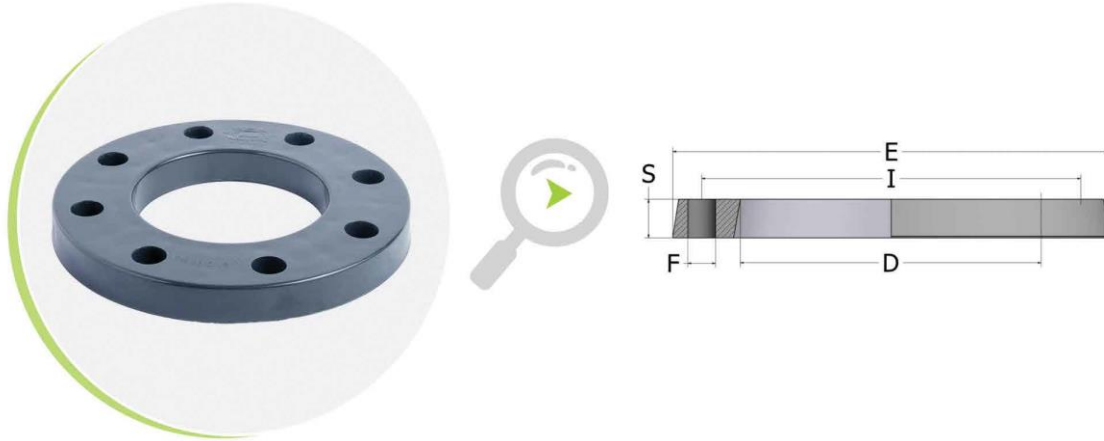

GENERAL SPECIFICATION :

- Operation pressure 16bar.
- Recommended Temperature 20C°.
- Available sizes from 3'' up to 8''.

CODE	d	DN	D	E	S	I	F	drill	Bolts	PN
FLG4501	90	80	110	200	20	160	18	8	M16x90	16
FLG4502	110	100	133	220	22	180	18	8	M16x100	16
FLG4503	125	110	149	230	24	190	18	8	M16x100	16
FLG4504	160	150	190	285	28	240	22	8	M16x120	16
FLG4505	200	200	235	340	30	295	22	8	M16x120	10
FLG4506	225	200	250	340	30	295	22	8	M16x120	10

- The above product meets the requirements of the European & Egyptian specifications (DIN 8063 - ISO 1452-3 – ES 848-2001).

Head Office.

15 Nablus St, from Shehab St,
Floor 4, App 10, Mohandessin, A.R.E
T. +202 33024067 F. +202 33423085

Factory.

2nd Industrial Zone Plot BG/9,
Sadat City, Al Monofia Governorate A.R.E
T. +2048 2656307 M. +201000443663

info@migagreen.com
migagreenplast

