


UPVC MALE ADAPTOR DATA SHEET

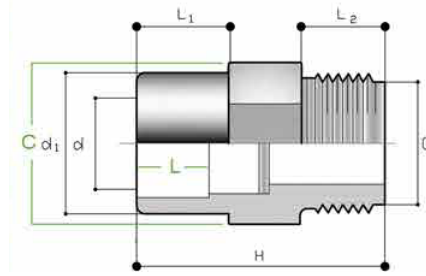

GENERAL SPECIFICATION :

- Operation pressure 16bar.
- Recommended Temperature 20C°.
- Available sizes from 1" up to 3".

CODE	dxd1xG	L2	L1	L	H	C	PN
MAD13007	32x40x1"	22	26	19.1	57	42	16
MAD13008	32x40x1¼"	22	26	21.4	60	46	16
MAD13009	40x50x1"	26	31	19.1	64	55	16
MAD13010	40x50x1¼"	26	31	21.4	66.5	55	16
MAD13011	40x50x1½"	26	31	21.4	66.5	55	16
MAD13012	50x63x1¼"	31	38	21.4	74	65	16
MAD13013	50x63x1"	19	38	31	71	65	16
MAD13014	50x63x1½"	22	38	31	74	65	16
MAD13015	50x63x2"	26	38	31	78	65	16
MAD13016	63x75x1½"	23	44	38	80	80	16
MAD13017	63x75x2"	26	44	47	84	80	16
MAD13018	63x75x2½"	38	44	30.2	91	80	16
MAD13019	75x90x1½"	22	51	44	89	95	16
MAD13020	75x90x2"	26	51	44	94	95	16
MAD13021	75x90x2½"	44	51	30.2	99	95	16
MAD13022	75x90x3"	44	51	30.3	102	95	16
MAD13023	90x110x2"	25	61	51	103	115	16
MAD13024	90x110x2½"	51	61	30.2	110	115	16
MAD13025	90x110x3"	33	61	51	110	115	16

- The above product meets the requirements of the European & Egyptian specifications (DIN 8063 - ISO 1452-3 – ES 848-2001).

Head Office.

15 Nablus St, from Shehab St,
Floor 4, App 10, Mohandessin, A.R.E
T. +202 33024067 F. +202 33423085

Factory.

2nd Industrial Zone Plot BG/9,
Sadat City, Al Monofia Governorate A.R.E
T. +2048 2656307 M. +201000443663

info@migagreen.com
migagreenplast

