


UPVC SOCKET DATA SHEET

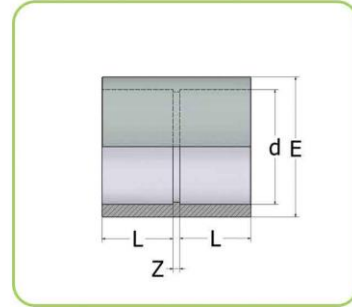

GENERAL SPECIFICATION :

- Operation pressure 16bar.
- Recommended Temperature 20C°.
- Available sizes from 1" up to 8".
- Types (threaded – glue) (inch/mm).

CODE	d	L	Z	E	PN
SKT2001	20	16	3	28	16
SKT2002	25	19	3	34	16
SKT2003	32	22	3	42	16
SKT2004	40	26	3	51	16
SKT2005	50	31	3	61	16
SKT2006	63	38	3	75	16
SKT2007	75	44	4	88	16
SKT2008	90	51	5	106	16
SKT2009	110	61	6	126	16
SKT2010	125	69	7	145	16
SKT2011	140	76	9	161	16
SKT2012	160	86	8	181	16
SKT2013	200	106	11	226	10
SKT2014	225	119	11	258	10
SKT2015	250	131.5	10	287	10
SKT2016	280	146	10	320	10
SKT2017	315	162	12	335	10
SKT2018	355	184	11	386	6
SKT2019	400	206	12	432	6

- The above product meets the requirements of the European & Egyptian specifications (DIN 8063 - ISO 1452-3 – ES 848-2001).

Head Office.

15 Nablus St, from Shehab St,
Floor 4, App 10, Mohandessin, A.R.E
T. +202 33024067 F. +202 33423085

Factory.

2nd Industrial Zone Plot BG/9,
Sadat City, Al Monofia Governorate A.R.E
T. +2048 2656307 M. +201000443663

info@migagreen.com
migagreenplast

