
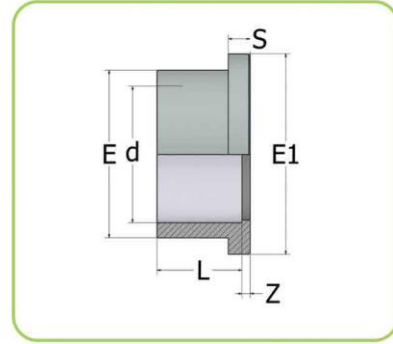


UPVC STUB SERRATED DATA SHEET

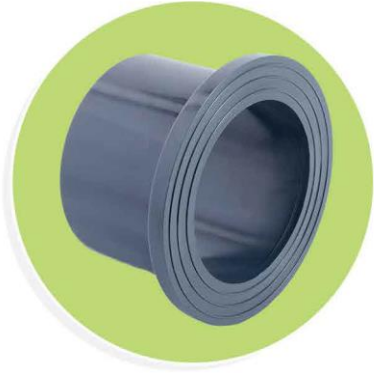

GENERAL SPECIFICATION :

- Operation pressure 16bar.
- Recommended Temperature 20C°.
- Available sizes from 3'' up to 8''.

CODE	d	DN	L	Z	S	E	EI	PN
STB4001	90	80	51	5	11	108	125	16
STB4002	110	100	61	5	12	131	150	16
STB4003	125	110	69	5	12	147	167	16
STB4004	160	150	86	6	16	185	213	16
STB4005	200	200	106	7	18	231	253	10
STB4006	225	200	119	8	19	247	274	10

- The above product meets the requirements of the European & Egyptian specifications (DIN 8063 - ISO 1452-3 – ES 848-2001).

Head Office.

15 Nablus St, from Shehab St,
Floor 4, App 10, Mohandessin, A.R.E
T. +202 33024067 F. +202 33423085

Factory.

2nd Industrial Zone Plot BG/9,
Sadat City, Al Monofia Governorate A.R.E
T. +2048 2656307 M. +201000443663

info@migagreen.com
migagreenplast

