


## UPVC UNION WITH O-RING DATA SHEET

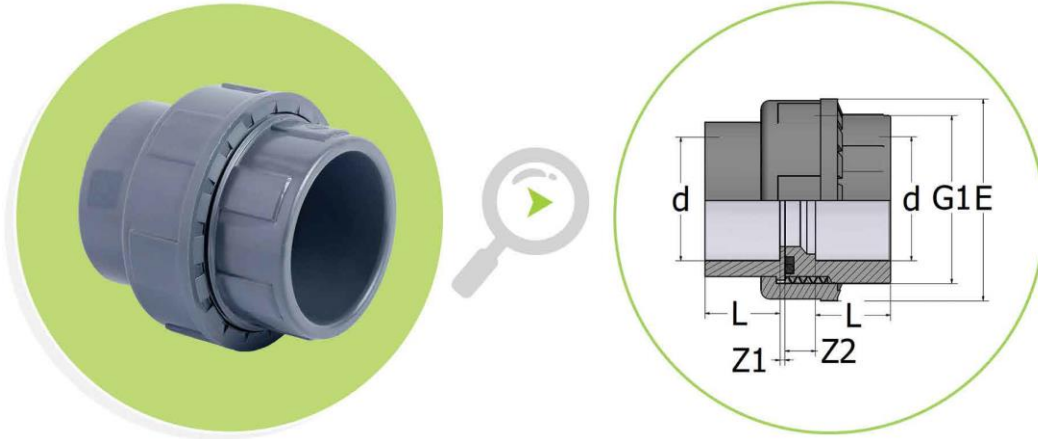

### GENERAL SPECIFICATION :

- Operation pressure 16bar.
- Recommended Temperature 20C°.
- Available sizes from 1" up to 2".
- Types ( threaded – glue ) ( inch/mm ).

CODE	d	Z1	Z2	G1	E	O-Ring	PN
UOR5501	20	16	10	1"	42	4081	16
UOR5502	25	19	10	1 1/4"	52	4112	16
UOR5503	32	22	10	1 1/2"	59	4131	16
UOR5504	40	26	12	2"	72	6162	16
UOR5505	50	31	14	2 1/4"	79	6187	16
UOR5506	63	38	18	2 3/4"	96	6237	16
UOR5507	75	44	18	3 1/2"	119	6312	16
UOR5508	90	51	18	4"	134	6362	16
UOR5509	110	61	18	5"	163	6450	16

- The above product meets the requirements of the European & Egyptian specifications (DIN 8063 - ISO 1452-3 – ES 848-2001).

#### Head Office.

15 Nablus St, from Shehab St,  
Floor 4, App 10, Mohandessin, A.R.E  
T. +202 33024067 F. +202 33423085

#### Factory.

2<sup>nd</sup> Industrial Zone Plot BG/9,  
Sadat City, Al Monofia Governorate A.R.E  
T. +2048 2656307 M. +201000443663

info@migagreen.com  
migagreenplast

